


Omvormer aansluiten (vervangen)

Oude/Defecte Soladin 600 Omvormer

- 1-Neem foto's
- 2-Gehele Omvormer
- 3-DC zijde
- 4-AC zijde
- 5-Kopel de stekkers los DC en AC

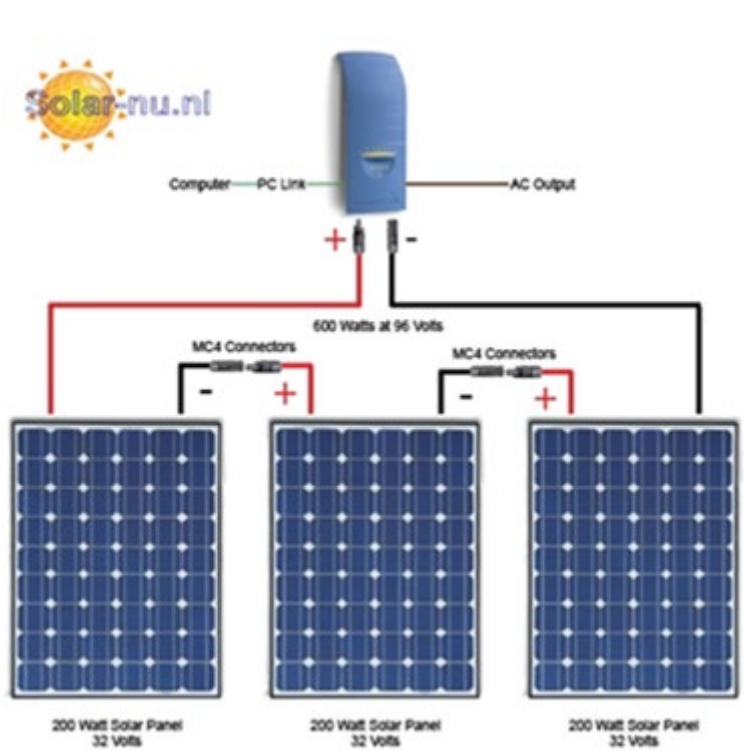

Nieuwe Omvormer, GROWATT

Growatt MIC 750TL-X (Aantal MPPT:1)
Art.Nr.: GROWATT MIC 750-X




- 1-Monteer de omvormer op de Oude Omvormer plaats.
- 2-DC-Monteer de 2 DC-stekkers op de nieuwe omvormer
- 3-AC-Monteer de nieuwe AC-stekker LETOP! De Fase/Nul/Aarde kabel.

DC Omvormer aansluiting:



AC Omvormer aansluiting:



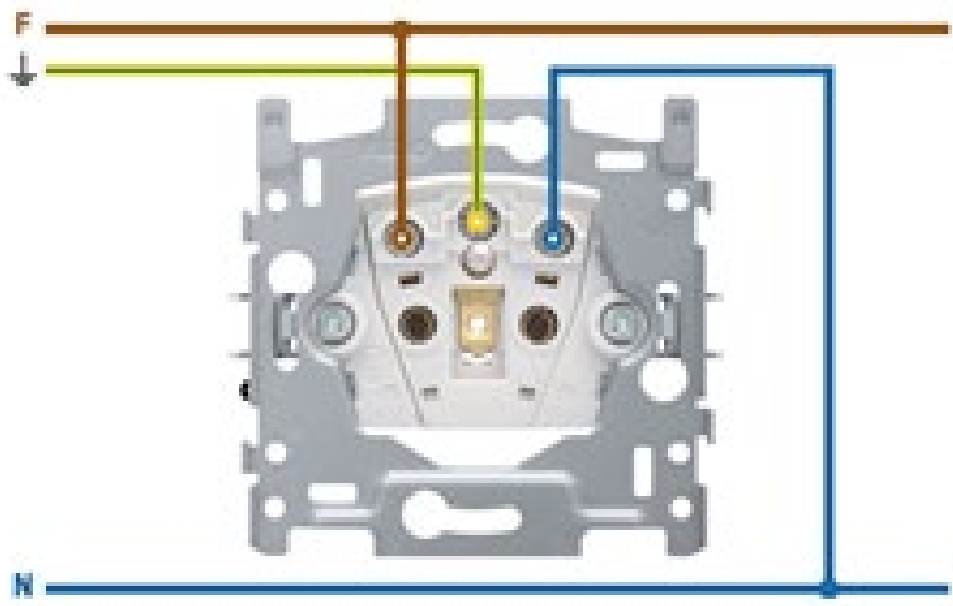

Legenda

- Fasegeleider
- Neutgeleider
- Aarding



4-De AC en DC Stekkers zijn aangesloten

AC Stekker 16A met Aardepen ivm Fase plaatsbepaling.

5-Steek de 230V stecker in het stopcontact/Connect met de groep naar de meterkast.

6-De Zonne-energiegroep is bij zonstraling in werking/produceert Zonne-energie.

1. Overview



Object	Description	Quantity
A	Inverter	1
B	Mounting bracket	1
C	Quick Guide	1
D	Monitor(Optional)	1
E	Signal connector	1
F	RJ 45 connector	1
G	Self-tapping screws	3
H	Safety-lock screws	2
I	Plastic expansion pipe	3

J	PV+/PV- terminal	1/1
K	PV+/PV- metal terminal	1/1
L	AC connector	1
M	Uninstall signal and AC connector tool	1
N	Uninstall PV connector	1

⚠ Notice:
Before installing the device, check that the package contents are intact and complete against the packing list. If any damage is found or any component missing, contact your dealer.